

M212A2GLED3

ROCKY oval-shaped bulkhead, Metal guard, 4000K, LED3, 1900 Lumens, 20W, A2 series



About Product

ROCKY LED bulkhead luminaire is designed and manufactured by Mazinoor for industrial applications. Sturdy body, durability, UV free, high efficacy, energy saving, environment friendliness, and high ingress protection (IP66) are among the highlights of this luminaire.



Technical Information

Catalogue Code/product code:	M212A2GLED3
Mounting Type:	Wall Mounted; Surface Mounted, Surface Mounted
Application:	Industrial area
Light source type:	DOB LED (PF> 0.9)
Module/ Lamp quantity:	1
CCT (Color temperature):	4000K - Neutral White
Light source:	LED
Lumen maintenance:	> 50.000 hours
Lumen maintenance factor:	L70
CRI (Color rendering index):	> 80
Power Consumption:	20
Luminous Flux:	1900
Efficacy (lm/W):	95
IP (Ingress Protection):	IP66
Insulation Class:	Class I
Mains voltage:	200~250 VAC
Voltage Frequency:	50 Hz
Wire / Cable Spec:	PVC solid wire
Wire cross section:	0.5
Terminal material:	Polycarbonate

M212A2GLED3


ROCKY oval-shaped bulkhead, Metal guard, 4000K, LED3, 1900 Lumens, 20W, A2 series

Terminal Spec:	3-Pole (Size: 2.5), Tool free wire connection. Cable looping is possible
Cable Looping:	Yes
Cable Gland Spec:	Polyamide
Cable gland type:	PG13.5
Body Material:	Die-Cast aluminum
Body Coating:	Powder coated
Body Color:	Milk white
RAL:	RAL9002
Diffuser/Glass Material:	Glass
Diffuser/Glass Shape:	Clear prismatic
Diffuser/Glass Characteristic:	Uniform light distribution
Light Distribution:	Uniform light distribution
Guard Material:	Die-Cast aluminum
Guard Coating:	Milk white powder coated
Gasket Material:	silicon
Gasket Characteristic:	Ingress protection against dust and moisture
Packaging type:	Nylon cover and carton
Order Option:	Junction box with 5 poles wire terminal for cable entry on three side of box, Metal gland
Weight(Kg):	1.7
Dimensions(mm):	305x180x140
Luminaire mechanical impact resistance:	IK07

M212A2GLED3

ROCKY oval-shaped bulkhead, Metal guard, 4000K, LED3, 1900 Lumens, 20W, A2 series

Photometric Graph

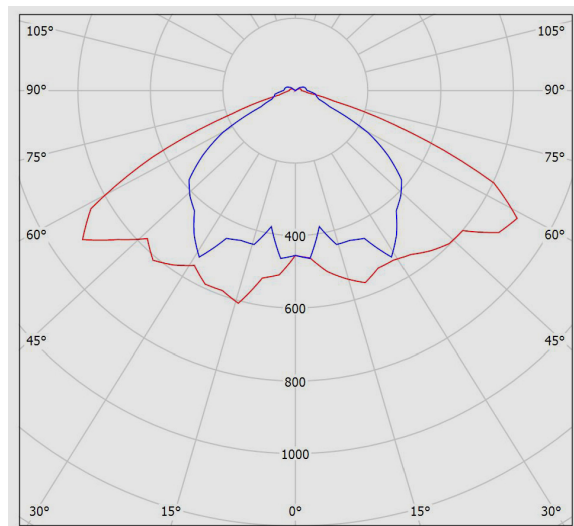

Dimensional Drawing

